

AS-Interface function module LOGO! standard slave
 IP20 4 DI/4 DQ Can be used for device series 0BA6 and 0BA7



General technical data:		
Design of the product		AS-Interface connection for LOGO!
Type		4 inputs (virtual) / 4 outputs (virtual)
Design of the slave type		standard slave
Supply voltage DC	V	24
Status display display of AS-Interface/diagnostics		green/red dual LED
Inputs:		
Number of digital inputs		4
Outputs:		
Number of digital outputs		4
Ambient conditions:		
Ambient temperature during operation	°C	0 ... 55
Protection class IP		IP20
Mechanical data:		
Width	mm	36
Height	mm	90
Depth	mm	58

Mounting type

on standard rail

Certificates/ approvals:

General Product Approval

Declaration of
Conformity

Test Certific-
ates

Shipping Ap-
proval



CSA



UL



EG-Konf.

[Type Test Certific-
ates/Test Report](#)



ABS

Shipping Approval

other



LRS



PRS



RINA



RMRS



ASi

[Confirmation](#)

other

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1400-0CE10-0AA2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1400-0CE10-0AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1400-0CE10-0AA2&lang=en

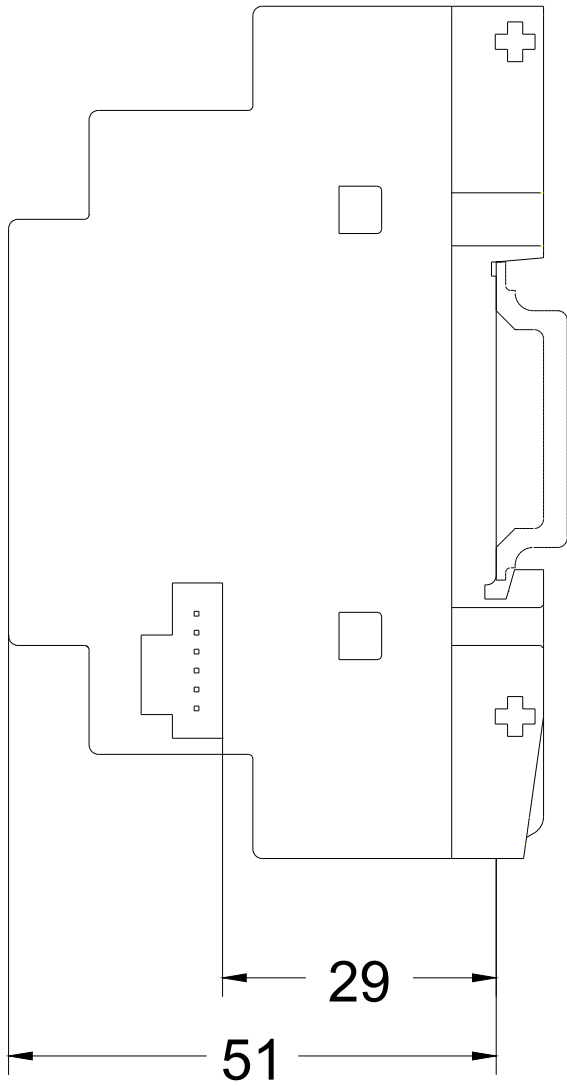

last modified:

10/23/2018

