

Vacuum contactor, AC-3 400 A, 200 kW / 400 V AC (50-60 Hz) / DC operation 96-127 V UC Auxiliary contacts 2 NO + 2 NC 3-pole, Size S12 Busbar connections Drive: electronic with PLC interface 24 V DC



Figure similar

| | |
|--------------------------|------------------|
| Product brand name | SIRIUS |
| Product designation | Vacuum contactor |
| Product type designation | 3RT12 |

| General technical data | |
|---|---|
| Size of contactor | S12 |
| Product extension | |
| <ul style="list-style-type: none"> function module for communication | No |
| <ul style="list-style-type: none"> Auxiliary switch | Yes |
| Surge voltage resistance | |
| <ul style="list-style-type: none"> of main circuit rated value | 8 kV |
| <ul style="list-style-type: none"> of auxiliary circuit rated value | 6 kV |
| maximum permissible voltage for safe isolation | |
| <ul style="list-style-type: none"> between coil and main contacts acc. to EN 60947-1 | 690 V |
| Protection class IP | |
| <ul style="list-style-type: none"> on the front | IP00; IP20 on the front with cover / box terminal |
| <ul style="list-style-type: none"> of the terminal | IP00 |

| | |
|---|--|
| Shock resistance at rectangular impulse | |
| <ul style="list-style-type: none"> • at AC • at DC | 8,5g / 5 ms, 4,2g / 10 ms 8,5g / 5 ms, 4,2g / 10 ms |
| Shock resistance with sine pulse | |
| <ul style="list-style-type: none"> • at AC • at DC | 13,4g / 5 ms, 6,5g / 10 ms 13,4g / 5 ms, 6,5g / 10 ms |
| Mechanical service life (switching cycles) | |
| <ul style="list-style-type: none"> • of contactor typical • of the contactor with added electronics-compatible auxiliary switch block typical • of the contactor with added auxiliary switch block typical | 10 000 000 5 000 000 10 000 000 |
| Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750 | K |
| Reference code acc. to DIN EN 81346-2 | Q |

Ambient conditions

| | |
|--|----------------------------------|
| Installation altitude at height above sea level | |
| <ul style="list-style-type: none"> • maximum | 2 000 m |
| Ambient temperature | |
| <ul style="list-style-type: none"> • during operation • during storage | -25 ... +60 °C -55 ... +80 °C |

Main circuit

| | |
|--|--|
| Number of poles for main current circuit | 3 |
| Number of NO contacts for main contacts | 3 |
| Operating voltage | |
| <ul style="list-style-type: none"> • at AC-3 rated value maximum | 1 000 V |
| Operating current | |
| <ul style="list-style-type: none"> • at AC-1 at 400 V <ul style="list-style-type: none"> — at ambient temperature 40 °C rated value • at AC-1 <ul style="list-style-type: none"> — up to 690 V at ambient temperature 40 °C rated value — up to 690 V at ambient temperature 60 °C rated value — up to 1000 V at ambient temperature 40 °C rated value — up to 1000 V at ambient temperature 60 °C rated value • at AC-2 at 400 V rated value • at AC-3 <ul style="list-style-type: none"> — at 400 V rated value — at 500 V rated value | 610 A 610 A 550 A 610 A 550 A 400 A 400 A 400 A |

| | |
|---|---------------------|
| — at 690 V rated value | 400 A |
| — at 1000 V rated value | 400 A |
| • at AC-4 at 400 V rated value | 350 A |
| Connectable conductor cross-section in main circuit at AC-1 | |
| • at 60 °C minimum permissible | 240 mm ² |
| • at 40 °C minimum permissible | 300 mm ² |
| Operating current for approx. 200000 operating cycles at AC-4 | |
| • at 400 V rated value | 175 A |
| • at 690 V rated value | 123 A |
| Operating power | |
| • at AC-1 | |
| — at 230 V at 60 °C rated value | 208 kW |
| — at 400 V rated value | 362 kW |
| — at 400 V at 60 °C rated value | 550 kW |
| — at 690 V rated value | 624 kW |
| — at 690 V at 60 °C rated value | 624 kW |
| — at 1000 V at 60 °C rated value | 905 kW |
| • at AC-2 at 400 V rated value | 200 kW |
| • at AC-3 | |
| — at 230 V rated value | 132 kW |
| — at 400 V rated value | 200 kW |
| — at 500 V rated value | 250 kW |
| — at 690 V rated value | 400 kW |
| — at 1000 V rated value | 560 kW |
| Operating power for approx. 200000 operating cycles at AC-4 | |
| • at 400 V rated value | 98 kW |
| • at 690 V rated value | 172 kW |
| Thermal short-time current limited to 10 s | 3 200 A |
| Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor | 21 W |
| No-load switching frequency | |
| • at AC | 1 000 1/h |
| • at DC | 1 000 1/h |
| Operating frequency | |
| • at AC-1 maximum | 700 1/h |
| • at AC-2 maximum | 250 1/h |
| • at AC-3 maximum | 750 1/h |
| • at AC-4 maximum | 250 1/h |

Control circuit/ Control

| | |
|---|---|
| Type of voltage of the control supply voltage | AC/DC |
| Control supply voltage at AC | |
| • at 50 Hz rated value | 96 ... 127 V |
| • at 60 Hz rated value | 96 ... 127 V |
| Control supply voltage at DC | |
| • rated value | 96 ... 127 V |
| Type of PLC-control input acc. to IEC 60947-1 | Type 1 |
| Consumed current at PLC-control input acc. to IEC 60947-1 maximum | 20 mA |
| Operating range factor control supply voltage rated value of magnet coil at DC | |
| • initial value | 0.8 |
| • Full-scale value | 1.1 |
| Operating range factor control supply voltage rated value of magnet coil at AC | |
| • at 50 Hz | 0.8 ... 1.1 |
| • at 60 Hz | 0.8 ... 1.1 |
| Design of the surge suppressor | with varistor |
| Apparent pick-up power of magnet coil at AC | |
| • at 50 Hz | 570 V·A |
| Inductive power factor with closing power of the coil | |
| • at 50 Hz | 0.8 |
| Apparent holding power of magnet coil at AC | |
| • at 50 Hz | 5.6 V·A |
| Inductive power factor with the holding power of the coil | |
| • at 50 Hz | 0.8 |
| Closing power of magnet coil at DC | 800 W |
| Holding power of magnet coil at DC | 3.6 W |
| Closing delay | |
| • at AC | 60 ... 90 ms |
| • at DC | 60 ... 90 ms |
| Opening delay | |
| • at AC | 80 ... 100 ms |
| • at DC | 80 ... 100 ms |
| Arcing time | 10 ... 15 ms |
| Control version of the switch operating mechanism | PLC-IN or Standard A1 - A2 (adjustable) |
| Auxiliary circuit | |
| Number of NC contacts for auxiliary contacts | |
| • instantaneous contact | 2 |
| Number of NO contacts for auxiliary contacts | |
| • instantaneous contact | 2 |
| Operating current at AC-12 maximum | 10 A |

| | |
|--|---|
| Operating current at AC-15 | |
| • at 230 V rated value | 6 A |
| • at 400 V rated value | 3 A |
| • at 500 V rated value | 2 A |
| • at 690 V rated value | 1 A |
| Operating current at DC-12 | |
| • at 24 V rated value | 10 A |
| • at 48 V rated value | 6 A |
| • at 60 V rated value | 6 A |
| • at 110 V rated value | 3 A |
| • at 125 V rated value | 2 A |
| • at 220 V rated value | 1 A |
| • at 600 V rated value | 0.15 A |
| Operating current at DC-13 | |
| • at 24 V rated value | 10 A |
| • at 48 V rated value | 2 A |
| • at 60 V rated value | 2 A |
| • at 110 V rated value | 1 A |
| • at 125 V rated value | 0.9 A |
| • at 220 V rated value | 0.3 A |
| • at 600 V rated value | 0.1 A |
| Contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) |

UL/CSA ratings

| | |
|---|-------------|
| Full-load current (FLA) for three-phase AC motor | |
| • at 480 V rated value | 361 A |
| • at 600 V rated value | 382 A |
| Yielded mechanical performance [hp] | |
| • for three-phase AC motor | |
| — at 200/208 V rated value | 125 hp |
| — at 220/230 V rated value | 150 hp |
| — at 460/480 V rated value | 300 hp |
| — at 575/600 V rated value | 400 hp |
| Contact rating of auxiliary contacts according to UL | A600 / Q600 |

Short-circuit protection

| | |
|---|--|
| Design of the fuse link | |
| • for short-circuit protection of the main circuit | |
| — with type of coordination 1 required | gG: 800 A (690 V, 100 kA) |
| — with type of assignment 2 required | gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415 V, 50 kA) |
| • for short-circuit protection of the auxiliary switch required | gG: 10 A (500 V, 1 kA) |

Installation/ mounting/ dimensions

| | |
|---|---|
| Mounting position | +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface |
| Mounting type | screw fixing |
| <ul style="list-style-type: none"> • Side-by-side mounting | Yes |
| Height | 210 mm |
| Width | 145 mm |
| Depth | 206 mm |
| Required spacing | |
| <ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side • for grounded parts <ul style="list-style-type: none"> — forwards — upwards — at the side — downwards • for live parts <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side | 20 mm 10 mm 10 mm 0 mm 20 mm 10 mm 10 mm 10 mm 20 mm 10 mm 10 mm 10 mm |

Connections/Terminals

| | |
|---|--|
| Type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit • for auxiliary and control current circuit | Connection bar screw-type terminals |
| Type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • at AWG conductors for main contacts | 2/0 ... 500 kcmil |
| Connectable conductor cross-section for main contacts | |
| <ul style="list-style-type: none"> • stranded | 70 ... 240 mm ² |
| Connectable conductor cross-section for auxiliary contacts | |
| <ul style="list-style-type: none"> • single or multi-stranded • finely stranded with core end processing | 0.5 ... 4 mm ² 0.5 ... 2.5 mm ² |
| Type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid — single or multi-stranded | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), max. 2x (0.75 ... 4 mm ²) 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²), max. 2x (0,75 ... 4 mm ²) |



| | |
|--|--|
| <ul style="list-style-type: none"> — finely stranded with core end processing • at AWG conductors for auxiliary contacts | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) 2x (20 ... 16), 2x (18 ... 14), 1x 12 |
| AWG number as coded connectable conductor cross section <ul style="list-style-type: none"> • for auxiliary contacts | 18 ... 14 |

Safety related data

| | |
|---|--|
| Product function <ul style="list-style-type: none"> • Mirror contact acc. to IEC 60947-4-1 • positively driven operation acc. to IEC 60947-5-1 | Yes No |
| Protection against electrical shock | finger-safe when touched vertically from front acc. to IEC 60529 |




Certificates/approvals


| | | |
|--|--|--|
| General Product Approval | Functional Safety/Safety of Machinery | Declaration of Conformity |
|  CCC  CSA  UL  EAC | Type Examination Certificate |  EG-Konf. |

| | | |
|--|---|--|
| Test Certificates | Marine / Shipping | other |
| Special Test Certificate | Type Test Certificates/Test Report  ABS  RMRS | Miscellaneous Confirmation |

Further information

- Information- and Downloadcenter (Catalogs, Brochures,...)**
<http://www.siemens.com/industrial-controls/catalogs>
- Industry Mall (Online ordering system)**
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1275-6NF36>
- Cax online generator**
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1275-6NF36>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
<https://support.industry.siemens.com/cs/ww/en/ps/3RT1275-6NF36>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1275-6NF36&lang=en
- Characteristic: Tripping characteristics, I^t, Let-through current**
<https://support.industry.siemens.com/cs/ww/en/ps/3RT1275-6NF36/char>
- Further characteristics (e.g. electrical endurance, switching frequency)**
<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1275-6NF36&objecttype=14&gridview=view1>

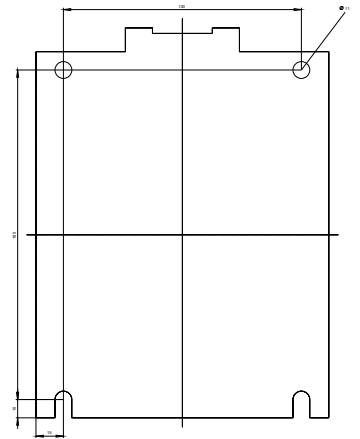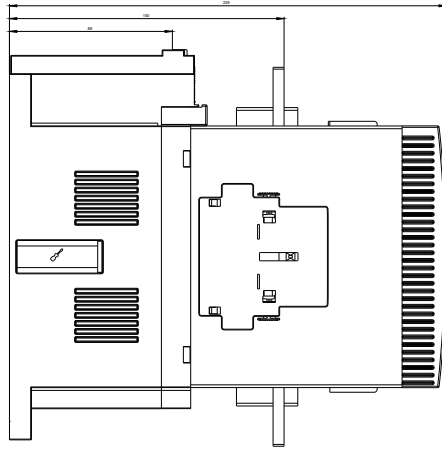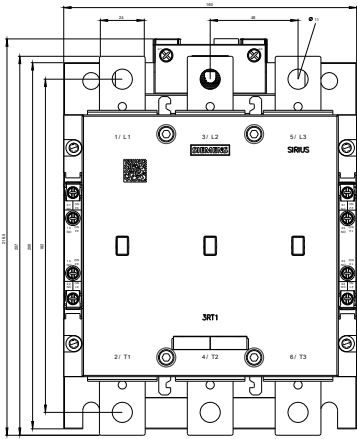

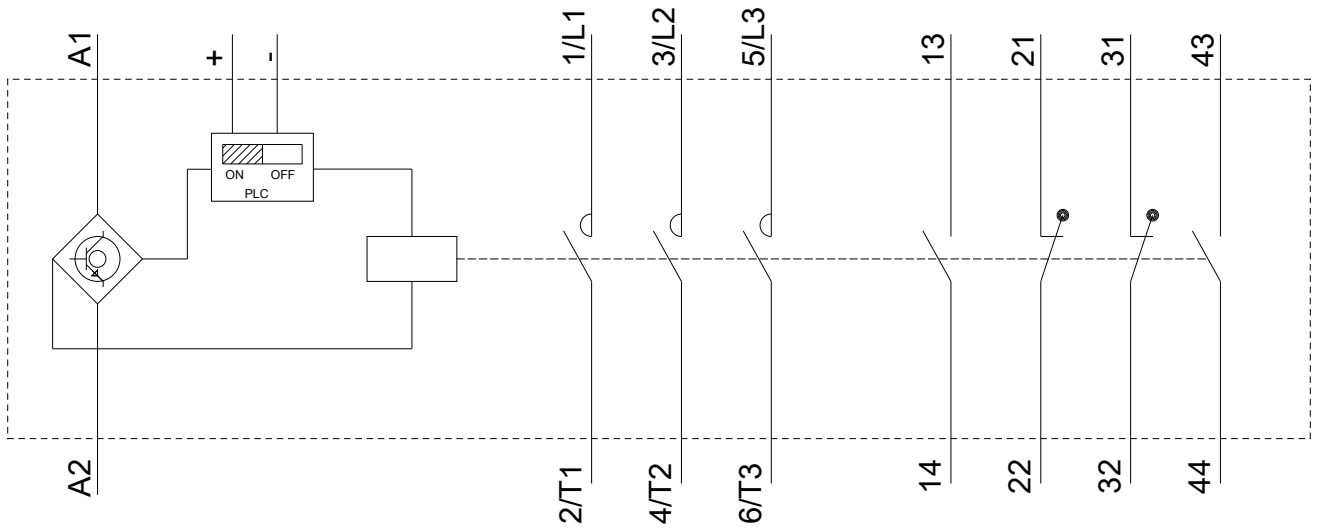

last modified:

12/22/2018