

Lightning conductor T1/T2, UN 240/400 V, UC 335 V A.C., pluggable protective modules, 3+0 circuit (TN-C), Width 54 mm



Article number

General data	
Standard	IEC 61643-11: 2011, EN 61643-11: 2012
Product designation	Surge protection device
SPD classification / acc. to EN 61643-11	
• Test Class I, Type 1	Yes
• Test Class II, Type 2	Yes
• Test Class III, Type 3	No
Number of SPD ports	1
Design of the product	Combination surge arresters
Design of pole	3
Designation of the protective paths	L-PEN
accessories	3 x 5SD7418-3
Mounting type	DIN rail NS 35
Material / of the enclosure	PA 6.6 / PBT
Size of surge arrester	3 MW
Degree of pollution	2
Overvoltage category / acc. to IEC 61010-1	III
Protection class IP / at connection all terminals	IP20

Shock acceleration	30 gn
Vibrational acceleration / at 5 Hz ... 500 Hz / limited to 2,5 h / per axis	7.5 gn
Ambient temperature / during operation	-40 °C ... 80 °C
Ambient temperature / during storage and transport	-40 °C ... 80 °C
Relative humidity / during operation	5 % ... 95 %
Installation altitude / at height above sea level / maximum	2 000 m
Width	53.4 mm
Height	89.9 mm
Depth	77.5 mm
Net weight	518 g

Electrical data	
Type of distribution system	TN-C
Operating voltage	240 / 415 V AC
Continuous operating voltage	
• maximum	335 V
Load current	80 A
Protective conductor current	2400 µA (255 V AC)
Apparent power consumption / maximum	810 mVA
Discharge current	
• at (8/20) µs	12.5 kA
• 1 phase / at (8/20) µs	50 kA
• between L and (PE)N / at (8/20) µs	12.5 kA
• between L and N / at (8/20) µs	50 kA
Total discharge current / at (8/20) µs	150 kA
Total lightning impulse current / at (10/350) µs	37.5 kA
Lightning current peak value / at (10/350) µs	12.5 kA
Charge of the lightning surge / at (10/350) µs	6.25 A·s
Short-circuit rating (SCCR) / at 264 V	25 kA
Protection level	1.2 kV
• maximum	1.2 kV
• between N and L	1.6 kV
Residual voltage	
• at rated value of discharge current / maximum	1.2 kV
• at 10 kA maximum	1.1 kV
• at 5 kA maximum	1 kV
• at 3 kA / maximum	0.9 kV
Response time	25 ns
Settable response factor / of trip current	1.6
Fuse protection type / at V-shaped connection	80 A AC (gG)
Fuse protection type / for T-connector	160 A AC (gG)

## Connections/Terminals

Type of electrical connection	Screw terminal
Wire stripping length	16 mm
Tightening torque	4.3 ... 4.7
Wire stripping length	16 mm
Connectable conductor cross-section	
• for finely stranded conductor	1.5 ... 25
• for rigid conductor	1.5 ... 35
• finely stranded	1.5 ... 25
AWG number / as coded connectable conductor cross section	15 ... 2
Design of the thread / of the connection screw	M5
Signal design	optical

## NEMA/UL - Data

Type of distribution system	TN-C
TOV behavior	
• at TOV test voltage	415 V AC (5 s / withstand mode)
Combustibility class acc. to UL 94	V0

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SD7413-2>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/5SD7413-2>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SD7413-2](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SD7413-2)

### CAX-Online-Generator

<http://www.siemens.com/cax>

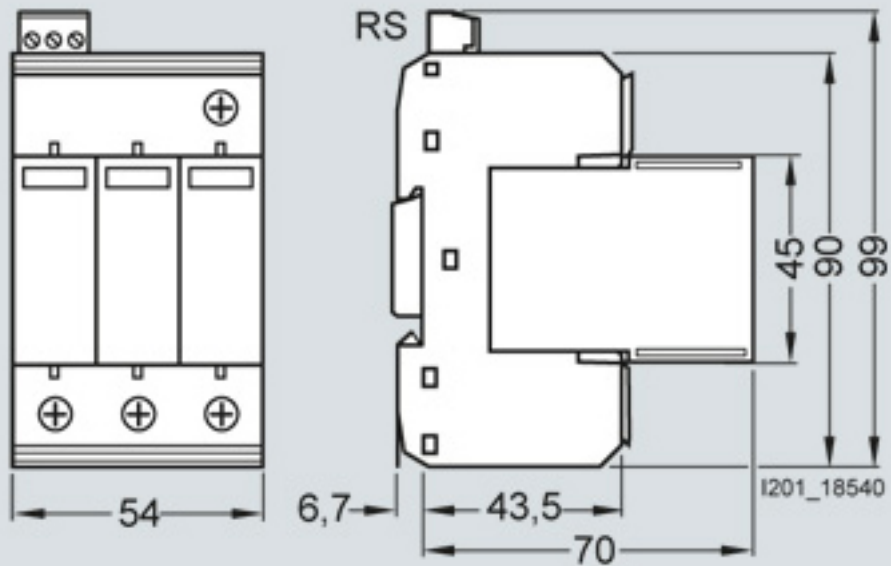

RS = remote signaling