



Figure similar

MLFB-Ordering data

6SL3210-1KE17-5AB1

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data	General tech. specifications																																								
Input <table> <tr> <td>Number of phases</td><td>3 AC</td></tr> <tr> <td>Line voltage</td><td>380 ... 480 V +10 % -20 %</td></tr> <tr> <td>Line frequency</td><td>47 ... 63 Hz</td></tr> <tr> <td>Rated current (LO)</td><td>9.50 A</td></tr> <tr> <td>Rated current (HO)</td><td>8.20 A</td></tr> </table>	Number of phases	3 AC	Line voltage	380 ... 480 V +10 % -20 %	Line frequency	47 ... 63 Hz	Rated current (LO)	9.50 A	Rated current (HO)	8.20 A	<table> <tr> <td>Power factor λ</td><td>0.70 ... 0.85</td></tr> <tr> <td>Offset factor $\cos \varphi$</td><td>0.95</td></tr> <tr> <td>Efficiency η</td><td>0.97</td></tr> <tr> <td>Sound pressure level (1m)</td><td>52 dB</td></tr> <tr> <td>Power loss</td><td>0.14 kW</td></tr> </table>	Power factor λ	0.70 ... 0.85	Offset factor $\cos \varphi$	0.95	Efficiency η	0.97	Sound pressure level (1m)	52 dB	Power loss	0.14 kW																				
Number of phases	3 AC																																								
Line voltage	380 ... 480 V +10 % -20 %																																								
Line frequency	47 ... 63 Hz																																								
Rated current (LO)	9.50 A																																								
Rated current (HO)	8.20 A																																								
Power factor λ	0.70 ... 0.85																																								
Offset factor $\cos \varphi$	0.95																																								
Efficiency η	0.97																																								
Sound pressure level (1m)	52 dB																																								
Power loss	0.14 kW																																								
Output <table> <tr> <td>Number of phases</td><td>3 AC</td></tr> <tr> <td>Rated voltage</td><td>400 V</td></tr> <tr> <td>Rated power IEC 400V (LO)</td><td>3.00 kW</td></tr> <tr> <td>Rated power NEC 480V (LO)</td><td>4.00 hp</td></tr> <tr> <td>Rated power IEC 400V (HO)</td><td>2.20 kW</td></tr> <tr> <td>Rated power NEC 480V (HO)</td><td>3.00 hp</td></tr> <tr> <td>Rated current (IN)</td><td>7.50 A</td></tr> <tr> <td>Rated current (LO)</td><td>7.30 A</td></tr> <tr> <td>Rated current (HO)</td><td>5.60 A</td></tr> <tr> <td>Max. output current</td><td>11.20 A</td></tr> <tr> <td>Pulse frequency</td><td>4.000 kHz</td></tr> <tr> <td>Output frequency for vector control</td><td>0 ... 240 Hz</td></tr> <tr> <td>Output frequency for V/f control</td><td>0 ... 550 Hz</td></tr> </table>	Number of phases	3 AC	Rated voltage	400 V	Rated power IEC 400V (LO)	3.00 kW	Rated power NEC 480V (LO)	4.00 hp	Rated power IEC 400V (HO)	2.20 kW	Rated power NEC 480V (HO)	3.00 hp	Rated current (IN)	7.50 A	Rated current (LO)	7.30 A	Rated current (HO)	5.60 A	Max. output current	11.20 A	Pulse frequency	4.000 kHz	Output frequency for vector control	0 ... 240 Hz	Output frequency for V/f control	0 ... 550 Hz	Ambient conditions <table> <tr> <td>Cooling</td><td>Air cooling using an integrated fan</td></tr> <tr> <td>Cooling air requirement</td><td>0.005 m³/s (0.177 ft³/s)</td></tr> <tr> <td>Installation altitude</td><td>1000 m (3280.84 ft)</td></tr> </table> Ambient temperature <table> <tr> <td>Operation</td><td>-10 ... 40 °C (14 ... 104 °F)</td></tr> <tr> <td>Transport</td><td>-40 ... 70 °C (-40 ... 158 °F)</td></tr> <tr> <td>Storage</td><td>-40 ... 70 °C (-40 ... 158 °F)</td></tr> </table> Relative humidity <table> <tr> <td>Max. operation</td><td>95 % At 40 °C (104 °F), condensation and icing not permissible</td></tr> </table>	Cooling	Air cooling using an integrated fan	Cooling air requirement	0.005 m³/s (0.177 ft³/s)	Installation altitude	1000 m (3280.84 ft)	Operation	-10 ... 40 °C (14 ... 104 °F)	Transport	-40 ... 70 °C (-40 ... 158 °F)	Storage	-40 ... 70 °C (-40 ... 158 °F)	Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible
Number of phases	3 AC																																								
Rated voltage	400 V																																								
Rated power IEC 400V (LO)	3.00 kW																																								
Rated power NEC 480V (LO)	4.00 hp																																								
Rated power IEC 400V (HO)	2.20 kW																																								
Rated power NEC 480V (HO)	3.00 hp																																								
Rated current (IN)	7.50 A																																								
Rated current (LO)	7.30 A																																								
Rated current (HO)	5.60 A																																								
Max. output current	11.20 A																																								
Pulse frequency	4.000 kHz																																								
Output frequency for vector control	0 ... 240 Hz																																								
Output frequency for V/f control	0 ... 550 Hz																																								
Cooling	Air cooling using an integrated fan																																								
Cooling air requirement	0.005 m³/s (0.177 ft³/s)																																								
Installation altitude	1000 m (3280.84 ft)																																								
Operation	-10 ... 40 °C (14 ... 104 °F)																																								
Transport	-40 ... 70 °C (-40 ... 158 °F)																																								
Storage	-40 ... 70 °C (-40 ... 158 °F)																																								
Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible																																								
Overload capability <table> <tr> <td>Low Overload (LO)</td><td>150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time</td></tr> <tr> <td>High Overload (HO)</td><td>200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time</td></tr> </table>	Low Overload (LO)	150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time	High Overload (HO)	200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time	Closed-loop control techniques <table> <tr> <td>V/f linear / square-law / parameterizable</td><td>Yes</td></tr> <tr> <td>V/f with flux current control (FCC)</td><td>Yes</td></tr> <tr> <td>V/f ECO linear / square-law</td><td>Yes</td></tr> <tr> <td>Sensorless vector control</td><td>Yes</td></tr> <tr> <td>Vector control, with sensor</td><td>No</td></tr> <tr> <td>Encoderless torque control</td><td>No</td></tr> <tr> <td>Torque control, with encoder</td><td>No</td></tr> </table>	V/f linear / square-law / parameterizable	Yes	V/f with flux current control (FCC)	Yes	V/f ECO linear / square-law	Yes	Sensorless vector control	Yes	Vector control, with sensor	No	Encoderless torque control	No	Torque control, with encoder	No																						
Low Overload (LO)	150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time																																								
High Overload (HO)	200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time																																								
V/f linear / square-law / parameterizable	Yes																																								
V/f with flux current control (FCC)	Yes																																								
V/f ECO linear / square-law	Yes																																								
Sensorless vector control	Yes																																								
Vector control, with sensor	No																																								
Encoderless torque control	No																																								
Torque control, with encoder	No																																								
	Communication <table> <tr> <td>Communication</td><td>RS485</td></tr> </table>	Communication	RS485																																						
Communication	RS485																																								



Figure similar

MLFB-Ordering data

6SL3210-1KE17-5AB1

Mechanical data		Connections	
Degree of protection	IP20 / UL open type	Signal cable	
Size	FSA	Conductor cross-section	0.15 ... 1.50 mm ² (AWG 24 ... AWG 16)
Net weight	1.70 kg (3.75 lb)	Line side	
Width	73 mm (2.87 in)	Version	Plug-in screw terminals
Height	196 mm (7.72 in)	Conductor cross-section	1.00 ... 2.50 mm ² (AWG 18 ... AWG 14)
Depth	203 mm (7.99 in)	Motor end	
Inputs / outputs		Version	Plug-in screw terminals
Standard digital inputs		Conductor cross-section	1.00 ... 2.50 mm ² (AWG 18 ... AWG 14)
Number	6	DC link (for braking resistor)	
Switching level: 0 → 1	11 V	Version	Plug-in screw terminals
Switching level: 1 → 0	5 V	Conductor cross-section	1.00 ... 2.50 mm ² (AWG 18 ... AWG 14)
Max. inrush current	15 mA	Line length, max.	15 m (49.21 ft)
Fail-safe digital inputs		PE connection	On housing with M4 screw
Number	1	Max. motor cable length	
Digital outputs		Shielded	150 m (492.13 ft)
Number as relay changeover contact	1	Unshielded	150 m (492.13 ft)
Output (resistive load)	DC 30 V, 0.5 A	Standards	
Number as transistor	1	Compliance with standards	UL, cUL, CE, C-Tick (RCM)
Output (resistive load)	DC 30 V, 0.5 A	CE marking	
Analog / digital inputs		EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC	
Number	1 (Differential input)		
Analog outputs			
Number	1 (Non-isolated output)		
PTC/ KTY interface			
1 motor temperature sensor input, sensors that can be connected: PTC, KTY and Thermo-Click, accuracy ±5 °C			




Figure similar

MLFB-Ordering data

6SL3210-1KE17-5AB1

Converter losses to EN 50598-2*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-68.30 %

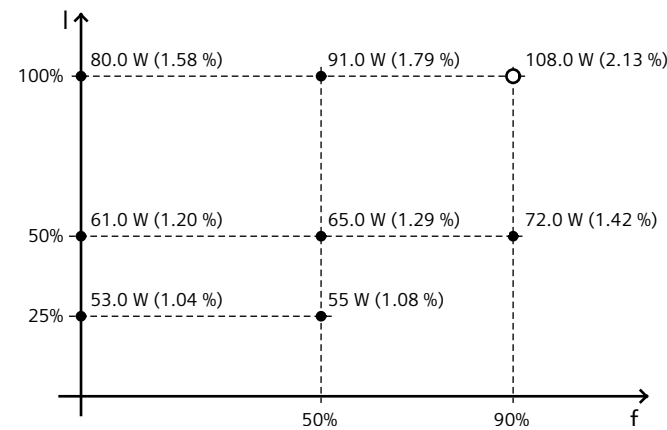

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*converted values